

# Captive Extrusion (Smartfix®)

## SOLIDAL® T3® (3mm) Wall cladding & Soffits

SOLIDAL® T3® (3mm) Captive fixing system (patented) has been developed to introduce a more efficient way of creating a facade free of exposed fixings and sealants. Eliminating labour intensive pre-fabrication of the SOLIDAL® materials makes SOLIDAL® Captive System a system of choice for installation contractors, whilst meeting clients budgets. Profiles (Mill Finish).

### COLOURS and FINISHES

- Continuous coated PPG PVDF
- Powdercoated
- Anodised (10, 15, 25 um)

### FABRICATION OPTIONS



- Curved & Folded
- Dimple & Pressed
- Laser cut & Perforated

To determine most suitable SOLIDAL® Material, Finish and Application System for your project, please contact your supplier.



3mm Facade Plate: By smartfix Facade Systems  
100% Australian designed and engineered

- A value engineered facade solution
- Fast to install and minimises workshop and site installation time
- No exposed face sealant
- No edge slot required to aluminum plate
- All edges capture and are mechanically fixed
- Concealed pressure seal gasket used at all vertical and horizontal joint connections
- Adaptable with CAPRAL commercial window systems
- AAF Evershield Coastal Anodise finish with 30 years warranty
- Available with SOLIDAL range of quality PVDF finishes
- Technical support and enquiries  
smartfix: info@smartfix.com.au  
CAPRAL: www.capral.com.au

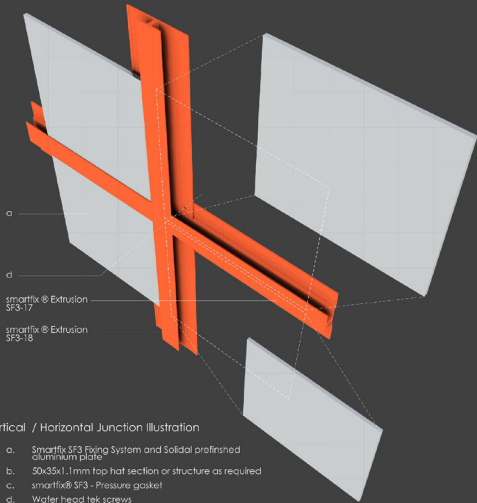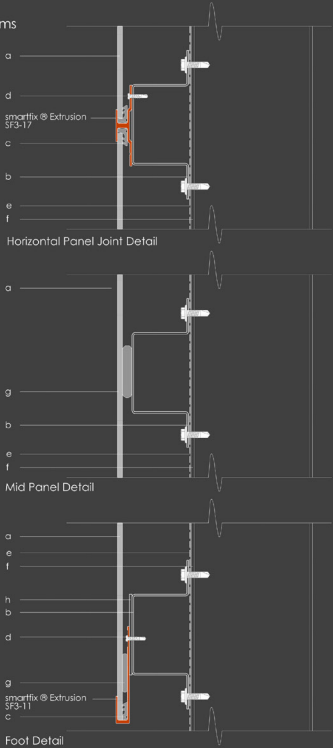

Vertical / Horizontal Junction Illustration

Technical Specifications

	SOLIDAL® T3®
Panel Thickness (mm)	3mm
Available width (mm)	1240mm, 1500mm, 2000mm
Length (mm)	up to 7000mm

SOLIDAL® Panels can be delivered as standard size or cut to measure.