



**SOLIDAL®**

## **Dimple**

SOLIDAL® T3® (3mm)

SOLIDAL® T4® (4mm)

**Wall cladding & Soffits**

# Dimple / Pressed

SOLIDAL® T3® (3mm)

SOLIDAL® T4® (4mm)


3D surface effect on SOLIDAL® T3® (3mm) and T4® (4mm) Solid Aluminium.  
Standard Dimple options include 15, 30, 60 and 120mm dimple diameter and 10, 20, 40% Dimpled Percentage.  
Customised options and logo stamping are available on request.

## COLOURS and FINISHES

- Continuous coated PPG PVDF
- Powdercoated
- Anodised (10, 15, 25 µm)

## APPLICATION SYSTEMS

- Captive Extrusion System
- Tongue & Groove System
- Cassette Fixing
- Face Fixing
- Ventilated System

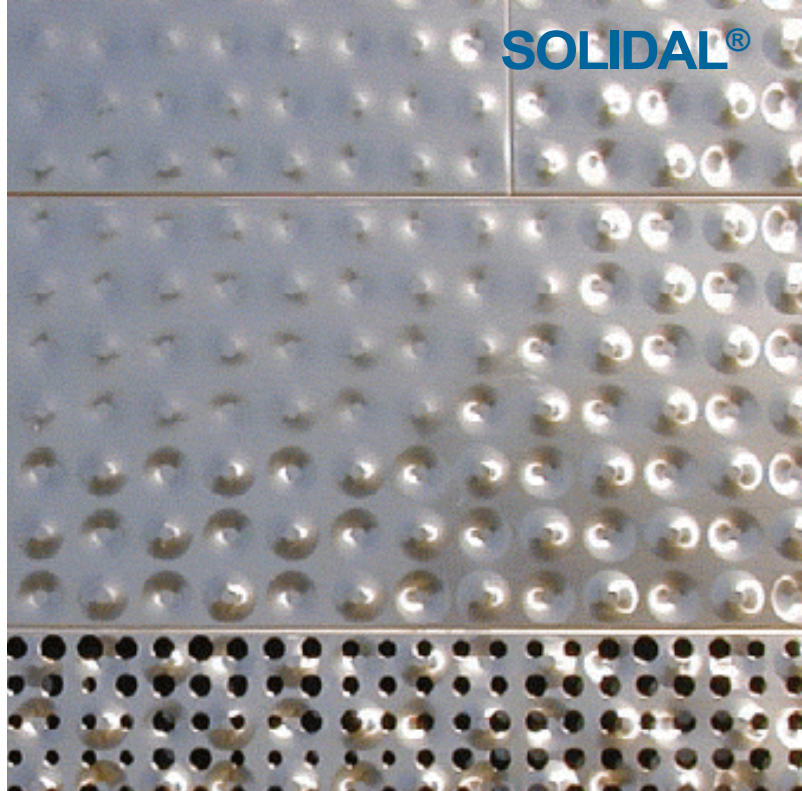

To determine most suitable SOLIDAL® Material, Finish and Application System for your project, please contact your supplier.



[www.solidalmetal.com](http://www.solidalmetal.com)

## Technical Specifications

	SOLIDAL® T3®	SOLIDAL® T4®
Panel Thickness (mm)	3mm	4mm
Available width (mm)	1240mm, 1500mm, 2000mm	
Length (mm)	up to 7000mm	
Standard Dimple Depth (mm)	2.5mm	